


Equipment antennas

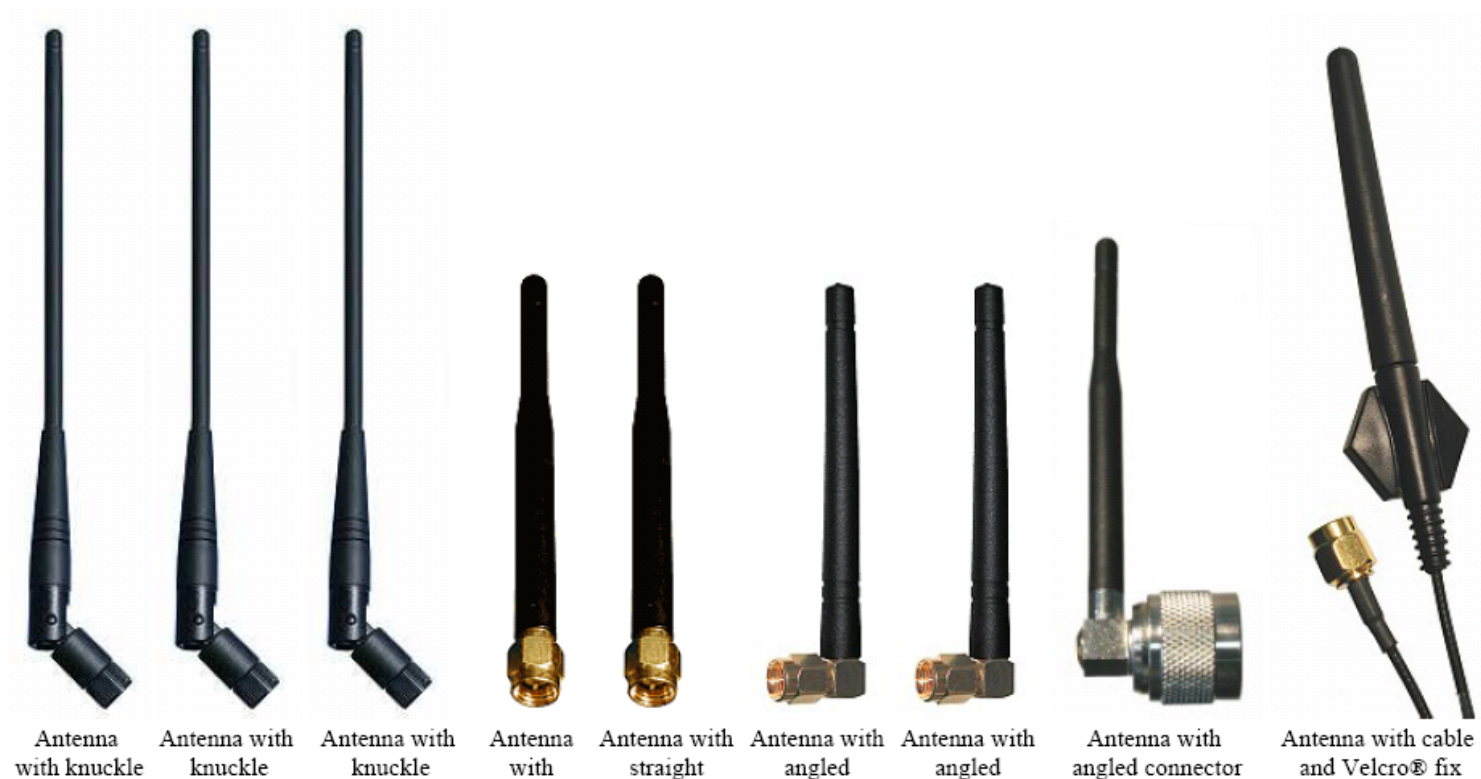

Type	17010.13	17010.13REV	17010.13RTNC	17010.10	17010.10REV	17010.11	17010.11REV	17010.11N	17010.12	
Frequency range	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	2350 - 2500	MHz
Electrical length	stacked halfwave dipole	stacked halfwave dipole	stacked halfwave dipole	halfwave dipole	halfwave dipole	halfwave dipole	halfwave dipole	halfwave dipole	halfwave dipole	
Impedance	50	50	50	50	50	50	50	50	50	Ω
SWR	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
Gain	7.0	7.0	7.0	2.1	2.1	2.1	2.1	2.1	2.1	dBi
Coating	Polyurethane, black									
Connector	SMA	RP-SMA	RP-TNC	SMA	RP-SMA	SMA	RP-SMA	N	SMA	
Length	200	200	200	95	95	77	77	93	85	mm
Cable length	-	-	-	-	-	-	-	-	250	mm
Order No	17010.13	17010.13REV	17010.13RTNC	17010.10	17010.10REV	17010.11	17010.11REV	17010.11N	17010.12	